


CS510 Series printer features

Standard
 Optional

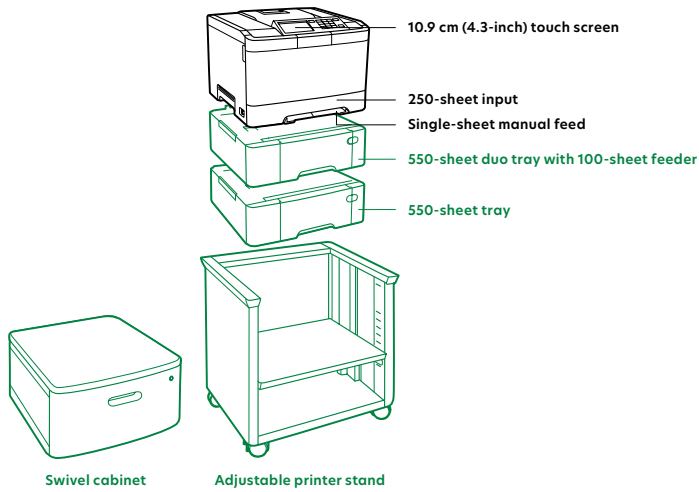

Product specifications	Lexmark CS510de	Lexmark CS510dte
Printing		
Display	Lexmark e-Task 4.3-inch (10.9 cm) colour touch screen	
Print Speed: Up to ⁷	Black: 32 ppm / Color: 32 ppm	
Time to First Page: As fast as	Black: 9 seconds / Color: 10 seconds	
Print Resolution	Black: 1200 x 1200 dpi, 4800 Color Quality (2400 x 600 dpi) / Color: 4800 Color Quality (2400 x 600 dpi), 1200 x 1200 dpi	
Memory / Processor	Standard: 512 MB / Maximum: 2560 MB / Dual Core, 800 MHz	
Hard Disk	Option available	
Recommended Monthly Page Volume ⁶	1500 - 7000 pages	
Maximum Monthly Duty Cycle: Up to ⁵	85000 pages per month	
Supplies⁴		
Laser Cartridge Yields (up to) ¹	4,000-page Black High Yield Cartridge, 8,000-page Black Extra High Yield Cartridge, 4,000-page Color (CMY) Extra High Yield Cartridges, 3,000-page Color (CMY) High Yield Cartridges, 1,000-page Black and Color (CMYK) Cartridges	
Photoconductor Estimated Yield: Up to ³	40,000 pages, based on 3 average letter/A4-size pages per print job and ~ 5% coverage	
Cartridge(s) Shipping with Product ¹	4,000-page Color (CMY) Extra High Yield Return Program Toner Cartridges, 6,000-page Black starter Return Program Toner Cartridge	
Paper Handling		
Included Paper Handling	125-Sheet Output Bin, Integrated Duplex, 250-Sheet Input, Single-Sheet Manual Feed	125-Sheet Output Bin, Integrated Duplex, 250-Sheet Input, Single-Sheet Manual Feed, 550-Sheet Duo Tray with 100-Sheet Feeder
Optional Paper Handling	550-Sheet Tray, 550-Sheet Duo Tray with 100-Sheet Feeder	550-Sheet Tray
Paper Input Capacity: Up to	Standard: 250+1 pages 20 lb or 75 gsm bond / Maximum: 1450+1 pages 20 lb or 75 gsm bond	Standard: 900+1 pages 20 lb or 75 gsm bond / Maximum: 1450+1 pages 20 lb or 75 gsm bond
Paper Output Capacity: Up to	Standard: 125 pages 20 lb or 75 gsm bond / Maximum: 125 pages 20 lb or 75 gsm bond	
Media Types Supported	Plain Paper, Transparencies, Card Stock, Refer to the Card Stock & Label Guide., Paper Labels	Plain Paper, Transparencies, Card Stock, Refer to the Card Stock & Label Guide., Envelopes, Paper Labels
Media Sizes Supported	Folio, JIS-B5, Executive, A5, Legal, Universal, Letter, Oficio, A4	7 3/4 Envelope, Folio, JIS-B5, DL Envelope, Executive, A5, Legal, 9 Envelope, Universal, B5 Envelope, Letter, Oficio, 10 Envelope, C5 Envelope, A4
General Information²		
Standard Ports	USB 2.0 Specification Hi-Speed Certified (Type B), Front USB 2.0 Specification Hi-Speed Certified port (Type A), Gigabit Ethernet (10/100/1000), Rear USB 2.0 Specification Hi-Speed Certified Port (Type A)	
Optional Network Ports	MarkNet N8352 802.11b/g/n Wireless	
Noise Level: Operating	Print: 50 dBA	
Specified Operating Environment	Temperature: 16 to 32°C (60 to 90°F), Humidity: 8 to 80% Relative Humidity, Altitude: 0 - 2896 Meters (9,500 Feet)	
Limited Warranty - See Statement of Limited Warranty	1-Year Exchange Service, Next Business Day	
Size (in. - H x W x D) / Weight (lb.)	12.1 x 17.4 x 16.0 in. / 46.1 lb.	17.2 x 17.4 x 16.4 in. / 55.3 lb.

¹Average continuous black or continuous composite CMY declared cartridge yield up to this number of standard pages in accordance with ISO/IEC 19798. ²Printers are sold subject to certain license/agreement conditions. See www.lexmark.com/printerlicense for details. ³Actual Yield may vary based on other factors such as device speed, paper size and feed orientation, toner coverage, tray source, percentage of black-only printing and average print job complexity. ⁴Product functions only with replacement cartridges designed for use in a specific geographical region. See www.lexmark.com/regions for more details. ⁵"Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs. ⁶"Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage. ⁷Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: www.lexmark.com/ISOspeeds.