


CX510 Series printer features

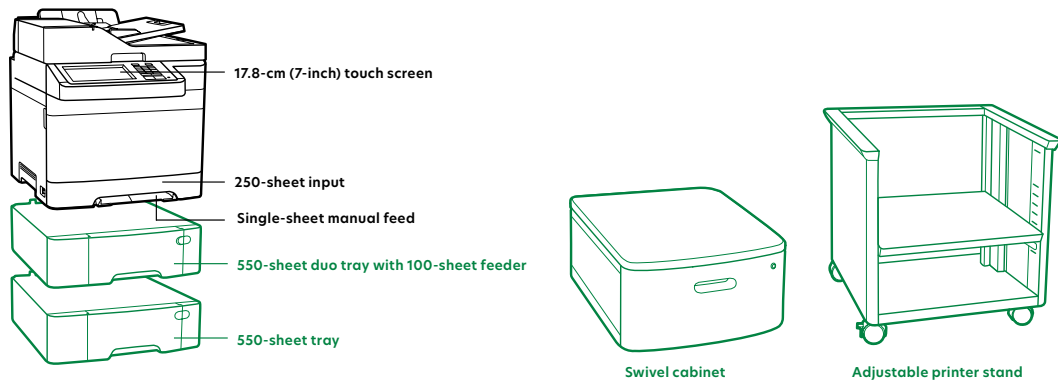

Product specifications	Lexmark CX510de	Lexmark CX510dhe	Lexmark CX510dthe
Printing			
Display	Lexmark e-Task 7-inch (17.8 cm) color touch screen		
Print Speed: Up to ⁷	Black: 32 ppm / Color: 32 ppm		
Time to First Page: As fast as	Black: 10.5 seconds / Color: 11.5 seconds		
Print Resolution	Black: 1200 x 1200 dpi, 4800 Color Quality (2400 x 600 dpi) / Color: 1200 x 1200 dpi, 4800 Color Quality (2400 x 600 dpi)		
Memory / Processor	Standard: 1024 MB / Maximum: 3072 MB / Dual Core, 800 MHz		
Hard Disk	Not Available	Included in configuration	
Recommended Monthly Page Volume ⁵	1500 - 7000 pages		
Maximum Monthly Duty Cycle: Up to ⁶	85000 pages per month		
Copying			
Copy Speed: Up to ⁷	Black: 32 cpm / Color: 32 cpm		
Time to First Copy: As fast as	Black: 10.8 seconds / Color: 11.6 seconds		
Scanning			
Scanner Type / ADF Scan	Flatbed scanner with ADF / RADF (Reversing Duplex)		
A4/Ltr Duplex Scan Speed: Up to	Black: 13 / 14 sides per minute / Color: 13 / 14 sides per minute		
A4/Ltr Simplex Scan Speed: Up to	Black: 30 / 32 sides per minute / Color: 30 / 32 sides per minute		
Faxing			
Modem Speed	ITU T.30, V.34 Half-Duplex, 33.6 Kbps		
Supplies⁴			
Laser Cartridge Yields (up to) ¹	1,000-page Black and Color (CMYK) Cartridges, 2,000-page Color (CMY) Cartridges, 3,000-page Color (CMY) High Yield Cartridges, 4,000-page Color (CMY) Extra High Yield Cartridges, 8,000-page Black Extra High Yield Cartridge, 2,500-page Black Cartridge, 4,000-page Black High Yield Cartridge		
Photoconductor Estimated Yield: Up to ²	40,000 pages, based on 3 average letter/A4-size pages per print job and ~ 5% coverage		
Cartridge(s) Shipping with Product ¹	4,000-page Color (CMY) Extra High Yield Return Program Toner Cartridges, 8,000-page Black Extra High Yield Return Program Toner Cartridge		
Paper Handling			
Included Paper Handling	250-Sheet Input, 150-Sheet Output Bin, Integrated Duplex, Single-Sheet Manual Feed	550-Sheet Duo Tray with 100-Sheet Feeder, 250-Sheet Input, 150-Sheet Output Bin, Integrated Duplex, Single-Sheet Manual Feed	
Optional Paper Handling	550-Sheet Duo Tray with 100-Sheet Feeder, 550-Sheet Tray	550-Sheet Tray	
Paper Input Capacity: Up to	Standard: 250+1 pages 20 lb or 75 gsm bond / Maximum: 1450+1 pages 20 lb or 75 gsm bond	Standard: 900+1 pages 20 lb or 75 gsm bond / Maximum: 1450+1 pages 20 lb or 75 gsm bond	
Paper Output Capacity: Up to	Standard: 150 pages 20 lb or 75 gsm bond / Maximum: 150 pages 20 lb or 75 gsm bond		
Media Types Supported	Paper Labels, Refer to the Card Stock & Label Guide., Card Stock, Transparencies, Plain Paper	Paper Labels, Envelopes, Refer to the Card Stock & Label Guide., Card Stock, Transparencies, Plain Paper	
Media Sizes Supported	Oficio, Letter, Universal, Legal, A5, Folio, A4, Executive, JIS-B5		C5 Envelope, 10 Envelope, Oficio, Letter, B5 Envelope, Universal, Legal, A5, Folio, 7 3/4 Envelope, Statement, A4, 9 Envelope, A6, Executive, DL Envelope, JIS-B5
General Information³			
Standard Ports	Rear USB 2.0 Specification Hi-Speed Certified Port (Type A), Gigabit Ethernet (10/100/1000), USB 2.0 Specification Hi-Speed Certified (Type B), Front USB 2.0 Specification Hi-Speed Certified port (Type A)		
Optional Network Ports	MarkNet N8352 802.11b/g/n Wireless		
Noise Level: Operating	Print: 50 dBA / Copy: 50 dBA / Scan: 49 dBA		
Specified Operating Environment	Altitude: 0 - 2896 Meters (9,500 Feet), Humidity: 8 to 80% Relative Humidity, Temperature: 16 to 32°C (60 to 90°F)		
Limited Warranty - See Statement of Limited Warranty	1-Year Onsite Service, Next Business Day		
Size (in. - H x W x D) / Weight (lb.)	18.44 x 17.48 x 23.2 in. / 62 lb.		23.63 x 17.48 x 23.2 in. / 71.3 lb.

¹Average continuous black or continuous composite CMY declared cartridge yield up to this number of standard pages in accordance with ISO/IEC 19798. ²Actual Yield may vary based on other factors such as device speed, paper size and feed orientation, toner coverage, tray source, percentage of black-only printing and average print job complexity. ³Printers are sold subject to certain license/agreement conditions. See www.lexmark.com/printerlicense for details. ⁴Product functions only with replacement cartridges designed for use in a specific geographical region. See www.lexmark.com/regions for more details. ⁵Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage. ⁶Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs. ⁷Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: www.lexmark.com/ISOspeeds.