


MS911de Series printer features

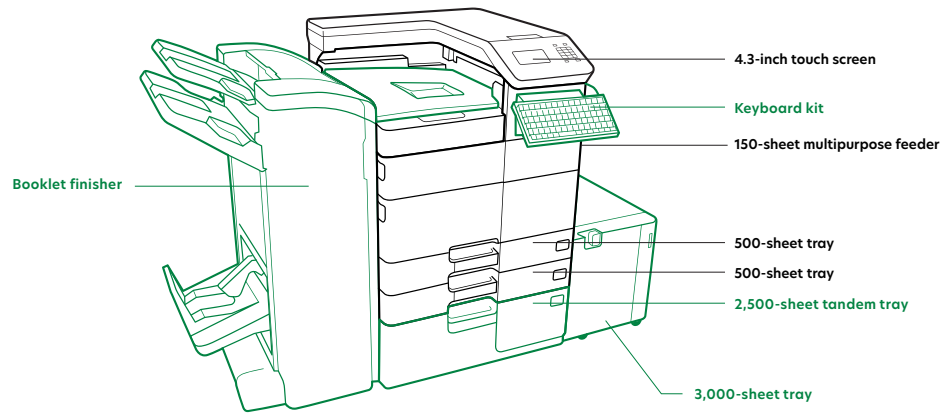

Product specifications	Lexmark MS911de
Printing	
Display	Lexmark e-Task 4.3-inch (10.9 cm) colour touch screen
Print Speed: Up to ²	Black: 55 ppm
Time to First Page: As fast as	Black: < 5.5 seconds
Print Resolution	Black: 600 x 600 dpi, 2400 Image Quality, 1200 x 1200 dpi, 1200 Image Quality
Memory / Processor	Standard: 512 MB / Maximum: 2560 MB / Dual Core, 800 MHz
Hard Disk	Option available
Recommended Monthly Page Volume ⁵	15000 - 59000 pages
Maximum Monthly Duty Cycle: Up to ⁴	300000 pages per month
Supplies	
Laser Cartridge Yields (up to) ¹	32,500-page High Yield Cartridge
Photoconductor Estimated Yield: Up to ³	125000 pages, based on 3 average letter/A4-size pages per print job and ~ 5% coverage
Cartridge(s) Shipping with Product ¹	21,000-page Starter Toner Cartridge
Paper Handling	
Included Paper Handling	2 x 500-Sheet Input, 150-Sheet Multipurpose Feeder, 250-Sheet Output Bin
Optional Paper Handling	2 x 500-Sheet Tray, Booklet Finisher, 3000-Sheet Tray, 2500-Sheet Tandem Tray, Inline Stapler, Staple Punch Finisher
Paper Input Capacity: Up to	Standard: 1150 pages 20 lb or 75 gsm bond / Maximum: 6650 pages 20 lb or 75 gsm bond
Paper Output Capacity: Up to	Standard: 250 pages 20 lb or 75 gsm bond / Maximum: 3500 pages 20 lb or 75 gsm bond
Media Types Supported	Refer to the Card Stock & Label Guide., Transparencies, Plain Paper, Labels, Envelopes, Card Stock
Media Sizes Supported	SRA3, A6, Oficio, Super Tabloid (12 x 18"), Universal, Statement, Letter, Legal, Ledger, JIS-B5, JIS-B4, Folio, Executive, DL Envelope, C5 Envelope, B5 Envelope, A5, A4, A3, 9 Envelope, 7 3/4 Envelope, 10 Envelope
General Information	
Standard Ports	Two Rear USB 2.0 Specification Hi-Speed Certified ports (Type A), Front USB 2.0 Specification Hi-Speed Certified port (Type A), Gigabit Ethernet (10/100/1000), USB 2.0 Specification Hi-Speed Certified (Type B), One Internal Card Slot
Optional Network Ports / Optional Local Ports	Internal MarkNet N8350 802.11b/g/n Wireless / Internal 1284-B Bidirectional Parallel, Internal RS-232C serial
Noise Level: Operating	Print: 54 dBA
Specified Operating Environment	Temperature: 10 to 30°C (50 to 86°F), Humidity: 15 to 85% Relative Humidity, Altitude: 0 - 2500 Meters (8,200 Feet)
Limited Warranty - See Statement of Limited Warranty	1-Year Onsite Service, Next Business Day
Size (in. - H x W x D) / Weight (lb.)	30.3 x 24.2 x 27.4 in. / 163 lb.

¹Average standard page yield value declared in accordance with ISO/IEC 19752. ²Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: www.lexmark.com/ISOspeeds. ³Actual Yield may vary based on other factors such as device speed, paper size and feed orientation, toner coverage, tray source, percentage of black-only printing and average print job complexity. ⁴"Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs. ⁵"Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage.

This is a Class A device according to the FCC Rules and international electromagnetic emissions standards. This device is not intended for use in residential or domestic environments due to potential interference to radio communications.

© 2015 Lexmark and the Lexmark logo are trademarks of Lexmark International, Inc., registered in the United States and/or other countries. All other trademarks are the property of their respective owners. ENERGY STAR® is a U.S. registered mark.

AirPrint and the AirPrint logo are trademarks of Apple Inc.