
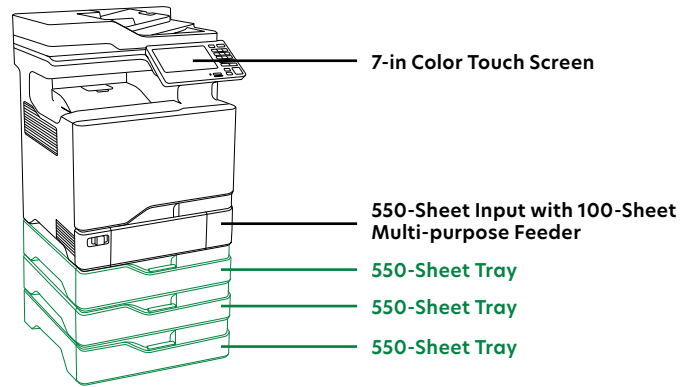


## Lexmark CX725 Series features

Adjustable Printer Stand



Standard  
 Optional

Product specifications	Lexmark CX725de	Lexmark CX725dhe	Lexmark CX725dthe
<b>Printing</b>			
Display	Lexmark e-Task 7-inch (17.8 cm) color touch screen		
Print Speed: Up to <sup>7</sup>	Black: 50 ppm / Color: 50 ppm		
Time to First Page: As fast as	Black: 5.0 seconds / Color: 5.5 seconds		
Print Resolution	Black: 1200 x 1200 dpi, 4800 Color Quality (2400 x 600 dpi) / Color: 1200 x 1200 dpi, 4800 Color Quality (2400 x 600 dpi)		
Memory	Standard: 2048 MB / Maximum: 4096 MB		
Hard Disk	Option available	Included in configuration	
Recommended Monthly Page Volume <sup>5</sup>	2000 - 20000 pages		
Maximum Monthly Duty Cycle: Up to <sup>6</sup>	150000 pages per month		
<b>Copying</b>			
Copy Speed: Up to <sup>7</sup>	Black: 50 cpm / Color: 50 cpm		
Time to First Copy: As fast as	Black: 6.5 seconds / Color: 7.0 seconds		
<b>Scanning</b>			
Scanner Type / ADF Scan	Flatbed scanner with ADF / RADF (Reversing Duplex)		
A4/Ltr Duplex Scan Speed: Up to	Black: 26 / 28 sides per minute / Color: 26 / 28 sides per minute		
A4/Ltr Simplex Scan Speed: Up to	Black: 56 / 60 sides per minute / Color: 56 / 60 sides per minute		
<b>Faxing</b>			
Modem Speed	ITU T.30, V.34 Half-Duplex, 33.6 Kbps		
<b>Supplies<sup>4</sup></b>			
Laser Cartridge Yields (up to) <sup>1</sup>	16,000-page Color (CMY) High Yield Cartridges, 3,000-page Black and Color (CMYK) Cartridges, 7,000-page Black and Color (CMYK) Cartridges, 25,000-page Black High Yield Cartridge		
Imaging Unit Estimated Yield: Up to <sup>2</sup>	150000 pages, based on 3 average letter/A4-size pages per print job and ~ 5% coverage		
Cartridge(s) Shipping with Product <sup>1</sup>	7,000-page Black and Color (CMYK) Return Program Toner Cartridges		
<b>Paper Handling</b>			
Included Paper Handling	Integrated Duplex, 300-Sheet Output Bin, 100-Sheet Multipurpose Feeder, 550-Sheet Input	550-Sheet Tray, Integrated Duplex, 300-Sheet Output Bin, 100-Sheet Multipurpose Feeder, 550-Sheet Input	
Optional Paper Handling	550-Sheet Tray		
Paper Input Capacity: Up to	Standard: 650 pages 20 lb or 75 gsm bond / Maximum: 2300 pages 20 lb or 75 gsm bond	Standard: 1200 pages 20 lb or 75 gsm bond / Maximum: 2300 pages 20 lb or 75 gsm bond	
Paper Output Capacity: Up to	Standard: 300 pages 20 lb or 75 gsm bond / Maximum: 300 pages 20 lb or 75 gsm bond		
Media Types Supported	Paper Labels, Envelopes, Vinyl Labels, Refer to the Card Stock & Label Guide., Card Stock, Plain Paper, Banner Paper		
Media Sizes Supported	C5 Envelope, 10 Envelope, Oficio, Letter, B5 Envelope, Universal, Legal, A5, Folio, 7 3/4 Envelope, Statement, A4, 9 Envelope, A6, Executive, DL Envelope, JIS-B5		
<b>General Information<sup>3</sup></b>			
Standard Ports	Rear Hi-Speed USB Port Compatible with USB 2.0 Specification (Type A), Gigabit Ethernet (10/100/1000), USB 2.0 Specification Hi-Speed Certified (Type B), One Internal Card Slot, Front USB 2.0 Specification Hi-Speed Certified port (Type A)		
Optional Network Ports	Internal MarkNet N8360 802.11b/g/n Wireless, NFC		
Noise Level: Operating	Print: 53 dBA / Copy: 56 dBA / Scan: 53 dBA		
Specified Operating Environment	Altitude: 0 - 2896 Meters (9,500 Feet), Temperature: 10 to 32°C (50 to 90°F), Humidity: 8 to 80% Relative Humidity		
Limited Warranty - See Statement of Limited Warranty	1-Year Onsite Service, Next Business Day		
Size (in. - H x W x D) / Weight (lb.)	25.5 x 19.9 x 21 in. / 99 lb.		30.2 x 19.9 x 21 in. / 114 lb.

<sup>1</sup>Average continuous black or continuous composite CMY declared cartridge yield up to this number of standard pages in accordance with ISO/IEC 19798. <sup>2</sup>Actual Yield may vary based on other factors such as device speed, paper size and feed orientation, toner coverage, tray source, percentage of black-only printing and average print job complexity. <sup>3</sup>Printers are sold subject to certain license/agreement conditions. See [www.lexmark.com/printerlicense](http://www.lexmark.com/printerlicense) for details. <sup>4</sup>Product functions only with replacement cartridges designed for use in a specific geographical region. See [www.lexmark.com/regions](http://www.lexmark.com/regions) for more details. <sup>5</sup>Recommended Monthly Page Volume<sup>5</sup> is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage. <sup>6</sup>Maximum Monthly Duty Cycle<sup>6</sup> is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs. <sup>7</sup>Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: [www.lexmark.com/ISOspeeds](http://www.lexmark.com/ISOspeeds).