


Color single function product

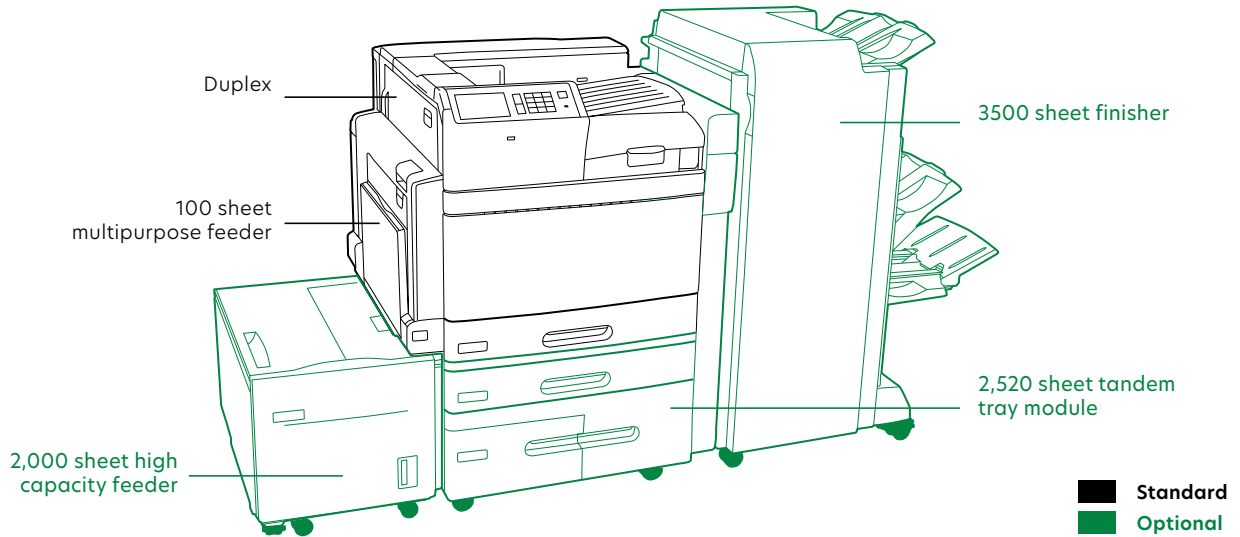

Product specifications	Lexmark C950de
Printing	
Display	Lexmark e-Task 4.3-inch (10.9 cm) color touch screen
Print Speed: Up to	Black: 50 ppm / Color: 45 ppm
Time to First Page: As fast as	Black: 5.2 seconds / Color: 7.7 seconds
Print Resolution	Black: 2400 Image Quality, 1200 x 1200 dpi / Color: 2400 Image Quality, 1200 x 1200 dpi
Memory	Standard: 1024 MB / Maximum: 2048 MB
Hard Disk	Option available
Recommended Monthly Page Volume ⁴	4000 - 33000 pages
Maximum Monthly Duty Cycle: Up to ³	225000 pages per month
Supplies	
Supplies Yield ¹	32,000-page Black Toner Cartridge, 22,000-page color (CMY) Toner Cartridges
Photoconductor Estimated Yield: Up to ²	115000 pages, based on 3 average letter/A4-size pages per print job and ~ 5% coverage
Cartridge(s) Shipping with Product ¹	16,000-page Black Starter Toner Cartridge, 11,000-page Color (CMY) Starter Toner Cartridges
Paper Handling	
Paper Handling Standard	520-Sheet Input Tray, 100-Sheet Multipurpose Feeder, Integrated Duplex, 500-Sheet Output Bin
Paper Handling Optional	520-Sheet Drawer Stand, 2,520-Sheet Tandem Tray Module, Booklet Finisher, 3 x 520-Sheet Drawer Stand, 3,500-Sheet Finisher, 2,000-Sheet High-Capacity Feeder, Banner Media Tray
Paper Input Capacity: Up to	Standard: 620 pages 20 lb or 75 gsm bond / Maximum: 5140 pages 20 lb or 75 gsm bond
Paper Output Capacity: Up to	Standard: 500 pages 20 lb or 75 gsm bond / Maximum: 3750 pages 20 lb or 75 gsm bond
Media Types Supported	Refer to the Card Stock & Label Guide., Transparencies, Plain Paper, Labels, Glossy Paper, Envelopes, Card Stock
Media Sizes Supported	A6, Oficio, Super Tabloid (12 x 18"), Universal, Statement, Letter, Legal, Ledger, JIS-B5, JIS-B4, Folio, Executive, DL Envelope, C5 Envelope, A5, A4, A3, 7 3/4 Envelope, 10 Envelope
General Information	
Standard Ports	Ethernet 10/100/1000 BaseTX (RJ-45), Rear USB 2.0 Specification Hi-Speed Certified Port (Type A), Front USB 2.0 Specification Hi-Speed Certified port (Type A), USB 2.0 Specification Hi-Speed Certified (Type B)
Optional Network Ports / Optional Local Ports	Internal MarkNet™ N8250 802.11b/g/n Wireless, Internal MarkNet™ N8130 Fiber Fast Ethernet / Internal 1284-B Bidirectional Parallel, Internal RS-232C serial
Noise Level: Operating	Print: 53 dBA
Specified Operating Environment	Humidity: 15 to 85% Relative Humidity, Temperature: 10 to 32°C (50 to 90°F), Altitude: 0 - 2500 Meters (8,200 Feet)
Limited Warranty - See Statement of Limited Warranty	1-Year Onsite Service, Next Business Day
Size (in. - H x W x D) / Weight (lb.)	22.24 x 25.20 x 26.97 in. / 209.5 lb.

¹Average continuous black or continuous composite CMY declared cartridge yield up to this number of standard pages in accordance with ISO/IEC 19798. ²Actual Yield may vary based on other factors such as device speed, paper size and feed orientation, toner coverage, tray source, percentage of black-only printing and average print job complexity. ³Maximum Monthly Duty Cycle™ is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs. ⁴Recommended Monthly Page Volume™ is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage.

This is a Class A device according to the FCC Rules and international electromagnetic emissions standards. This device is not intended for use in residential or domestic environments due to potential interference to radio communications.

© 2016 Lexmark and the Lexmark logo are trademarks of Lexmark International, Inc., registered in the United States and/or other countries. All other trademarks are the property of their respective owners. ENERGY STAR® is a U.S. registered mark.

AirPrint and the AirPrint logo are trademarks of Apple Inc.